

ELite-LED HO


NEW



Economically Priced Light Fixture with Integrated Driver

HIGH OUTPUT HIGH EFFICACY


The ELite-LED HO is the perfect solution for new installation where lower upfront costs are required. It features an integrated electronic driver and connecting system for easy installation. The ELite-LED uses half the energy of T5 HO fluorescents with the equitable brightness and more than twice the lifetime. It is also now available in a dimmable version.



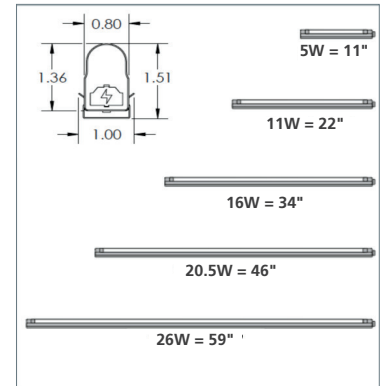


Product-Features

- 120 Vac LED with integrated electronic driver
- Available in five different sizes: 1' (6 W), 2' (11 W), 3' (16 W), 4' (20.5 W), 5' (26 W)
- **DLC 4.4 QPL** listed
- Stocked in 3000 K and 4000 K
- Finish: White housing with white frosted lens
- 50,000 hours usable life
- Good CRI >80
- Efficacy ≥ 150 lm/W
- Fixtures can interconnect with direct connectors or accessory cables
- Optional hardwire adapter box available
- Magnetic mounting clips available

Fixture	Watts	Max Interconnected
EL/LED/12/HO	6 W	83
EL/LED/22/HO	11 W	45
EL/LED/34/HO	16 W	31
EL/LED/46/HO	20.5 W	24
EL/LED/59/HO	26 W	19



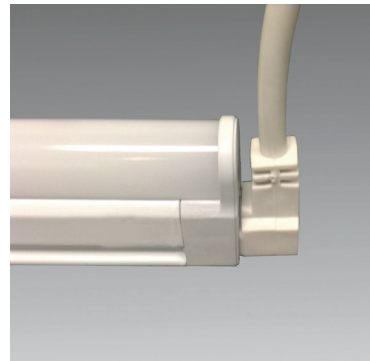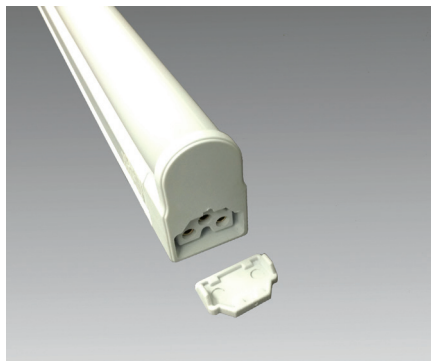

90 Degree Connector

What you'll need to buy

Light Fixtures

Length	Watt	Lumens	Code No. 3000 K
1'	6 W	710	EL/LED/12/3000/277/HO
2'	11 W	1450	EL/LED/22/3000/277/HO
3'	16 W	2150	EL/LED/34/3000/277/HO
4'	20.5	2900	EL/LED/46/3000/277/HO
5'	26 W	3550	EL/LED/59/3000/277/HO

Length	Watt	Lumens	Code No. 4000 K
1'	6 W	710	EL/LED/12/4000/277/HO
2'	11 W	1450	EL/LED/22/4000/277/HO
3'	16 W	2150	EL/LED/34/4000/277/HO
4'	20.5 W	2900	EL/LED/46/4000/277/HO
5'	26 W	3550	EL/LED/59/4000/277/HO

Power Cords

	Length	Code No.
With Plug	36"	EL/LED/PC36
	48"	EL/LED/PC48
	72"	EL/LED/PC72
	96"	EL/LED/PC96
	132"	EL/LED/PC132
	144"	EL/LED/PC144

* 90 degree power cord available by special order

Accessories

	Code No.
Hardwire Box	EL/LED/HWB
Hardwire Box, switch	EL/LED/HWB/S

Connecting Cables

	Length	Code No.
Straight Connector	6"	EL/LED/CC6
	12"	EL/LED/CC12
	24"	EL/LED/CC24
	36"	EL/LED/CC36
	48"	EL/LED/CC48
	72"	EL/LED/CC72
90 Degree Connector	96"	EL/LED/CC96
	144"	EL/LED/CC144
90 Degree Connector	6"	EL/LED/CC6/90
	12"	EL/LED/CC12/90
	24"	EL/LED/CC24/90
	36"	EL/LED/CC36/90
	48"	EL/LED/CC48/90
	72"	EL/LED/CC72/90
	96"	EL/LED/CC96/90
	144"	EL/LED/CC144/90