

SlimLite XL T5





T5 Fluorescent Light Fixture with Integrated Connecting System and Electronic Ballast

The XL offers all the benefits of SlimLite: It's cooler, brighter and more compact than most other fluorescent fixtures. SlimLite XL features standard T-5 lamps which are available in a variety of light colors. Its optional plexiglas cover makes it an ideal light fixture for food applications.

Product-Features

- Built-in electronic ballast
- Energy efficient, only 8 W, 14 W, 21 W, 28 W and 35 W
- Uses standard T-5 lamps (to be ordered separately)
- Good CRI > 80
- Plug-in modular system permits easy connection for continuous lighting
- Long bulb life, rated 20,000 hrs.
- Available in five different lengths:
1' (12 $\frac{7}{8}$ "), 2' (23 $\frac{1}{8}$ "), 3' (34 $\frac{7}{8}$ "),
4' (46 $\frac{3}{4}$ ") and 5' (58 $\frac{7}{16}$ ") width: 29 $\frac{1}{32}$ " , height: 1 $\frac{5}{16}$ "
- Optional plexiglass cover available (to be ordered separately)
- Contemporary white housing
- End of lamp life circuitry to protect ballast

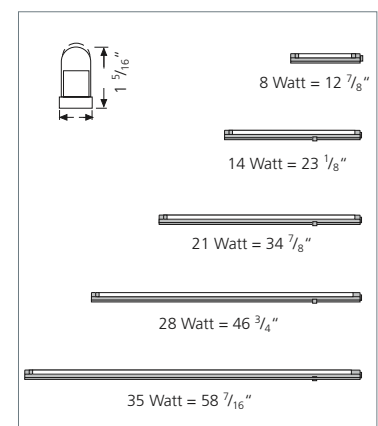

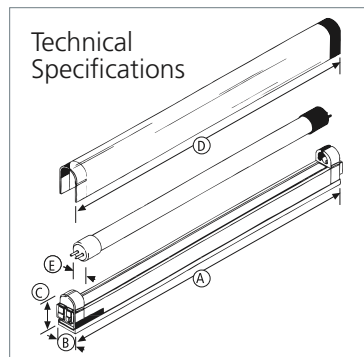

What you'll need to buy

SlimLite XL Fluorescent Light Fixture

Description	Watt	Length	Code No.
ES12	8	12 ⁷ / ₈ "	ES12/R
ES22	14	23 ¹ / ₈ "	ES22/R
ES34	21	34 ⁷ / ₈ "	ES34/R
ES46	28	46 ³ / ₄ "	ES46/R
ES59	35	58 ⁷ / ₁₆ "	ES59/R

Also available with bulb and cover. Add BC (Cool White) or WW BC (Warm White) to product code.

Accessories

Description	Code No.
-------------	----------

Power Cord, Connecting Cables, Hardwire Box, Direct Connector and Switch same as SlimLite, see page 63

Replacement Bulb	8W Cool White	SFB8
	8W Warm White	SFB8WW
	14W Cool White	SFB14
	14W Warm White	SFB14WW
	21W Cool White	SFB21
	21W Warm White	SFB21WW
	28W Cool White	SFB28
	28W Warm White	SFB28WW
	35W Cool White	SFB35
	35W Warm White	SFB35WW
Plexiglas Cover	for ES12	SPLX12/R
	for ES22	SPLX22/R
	for ES34	SPLX34/R
	for ES46	SPLX46/R
	for ES59	SPLX59/R

	ES12	ES22	ES34	ES46	ES59
Ⓐ fixture length	12 ⁷ / ₈ "	23 ¹ / ₈ "	34 ⁷ / ₈ "	46 ³ / ₄ "	58 ⁷ / ₁₆ "
Ⓑ fixture width	²⁹ / ₃₂ "	²⁹ / ₃₂ "	²⁹ / ₃₂ "	²⁹ / ₃₂ "	²⁹ / ₃₂ "
Ⓒ fixture height with diffuser	1 ⁵ / ₁₆ "	1 ⁵ / ₁₆ "	1 ⁵ / ₁₆ "	1 ⁵ / ₁₆ "	1 ⁵ / ₁₆ "
Ⓓ tube length	11 ¹ / ₄ "	21 ¹ / ₂ "	33 ¹ / ₄ "	45 ¹ / ₈ "	57"
Ⓔ tube diameter	T5 (⁵ / ₈ "	T5 (⁵ / ₈ "	T5 (⁵ / ₈ "	T5 (⁵ / ₈ "	T5 (⁵ / ₈ "
watts	8	14	21	28	35
lumens	400	1350	2100	2900	3650
current	136 mA	136 mA	198 mA	253 mA	315 mA
in-rush current	less than 5 AMP				
CRI	> 82	> 82	> 82	> 82	> 82
voltage	AC 120	AC 120	AC 120	AC 120	AC 120
frequency	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz
maximum watts in line	585 Watts	585 Watts	585 Watts	585 Watts	585 Watts