

# SlimLite XL-LED







## An Easy Way to Upgrade to LED

The SlimLiteXL-LED is an easy way to upgrade from current SlimLite XL fluorescent fixtures to LED. Just unplug the existing fixture, plug in the new fixture to existing power cords and you are on your way to energy efficient and low maintenance displays. With the same light output as our T5 fluorescent, this LED uses only half the energy and offers double the lamp life.

## Product-Features

- LED with integrated electronic driver
- Available in five different sizes: 1' (3.5 W), 2' (6.7 W), 3' (10.8 W) and 4' (14.5 W)
- Stocked in 3000 K and 4100 K
- Available from 2700 K to 6500 K by special order
- 50,000 hours useable life
- Excellent CRI > 85
- Plug-in modular system allows for easy installation and continuous lighting
- Approved for use in closet applications
- Optional plexiglas cover available (to be ordered separately)

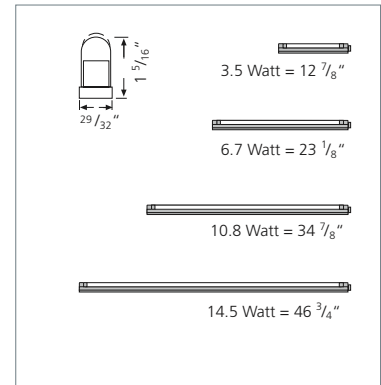

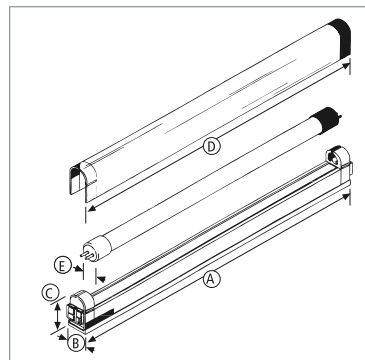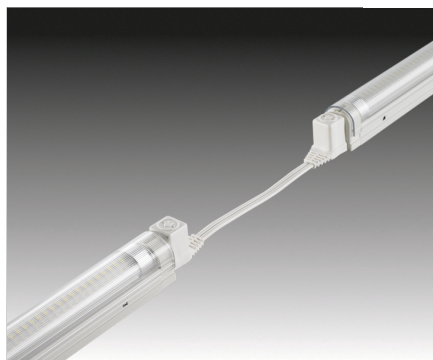

## What you'll need to buy

### Light Fixtures

Description	Watt	Length	Lumens	Color	Code No.
ES12LED	3.5	12 7/8"	298	3000 K	ES12LED/WW
			348	4100 K	ES12LED/CW
ES22LED	6.7	23 1/8"	567	3000 K	ES22LED/WW
			661	4100 K	ES22LED/CW
ES34LED	10.8	34 7/8"	895	3000 K	ES34LED/WW
			1044	4100 K	ES34LED/CW
ES46LED	14.5	46 3/4"	1193	3000 K	ES46LED/WW
			1392	4100 K	ES46LED/CW

Includes LED tube

	ES12	ES22	ES34	ES46
fixture length	12 7/8"	23 1/8"	34 7/8"	46 3/4"
fixture width	29/32"	29/32"	29/32"	29/32"
fixture height with diffuser	1 5/16"	1 5/16"	1 5/16"	1 5/16"
tube length	11 1/4"	21 1/2"	33 1/4"	45 1/8"
tube diameter	5/8"	5/8"	5/8"	5/8"
watts	3,5	6,7	10,8	14,5
lumens	348	661	1044	1392
line current	0,04	0,09	0,13	0,16
CRI	> 85	> 85	> 85	>85
voltage	AC 120	AC 120	AC 120	AC 120
frequency	60 Hz	60 Hz	60 Hz	60 Hz
maximum watts in line	585 watts	585 watts	585 watts	585 watts
power factor	> .95	> .97	> .98	> .98
efficiency (%)	> 70	> 70	> 75	> 75

### Accessories

	Description	Code No.
Power Cord*	6' long	SPC/XL
	6' with roller switch	SPC/S/XL
Connecting Cables	6" long	SCC6/XL
	1' long	SCC12/XL
	2' long	SCC24/XL
	4' long	SCC48/XL
	6' long	SCC72/XL
	10' long	SCC120/XL
Direct Connector		SDC/XL
Hardwire Box		SHWC/XL
	with switch	SHWC/S/XL
On/OFF Rocker Switch		SRS/XL
Optional Plexiglas Cover	for ES12LED	SPLX12
	for ES22LED	SPLX22
	for ES34LED	SPLX34
	for ES46LED	SPLX46

\*Note: Power cords and connecting cables are also available with 90° or straight connectors and in various lengths