

SlimLite XL Grounded

* Available by Special Order Only

NEW





Compact, Grounded Fluorescent Fixture

The SlimLite XL/G offers all the benefits of SlimLite and in addition, enhances personal safety while helping to protect against unwanted voltages, currents and power surges. The Grounded Slimlite XL is supplied in five lengths enabling continuous rows of light of up to 585 W, which makes it the perfect lighting system for gondolas, store fixtures and long runs of shelves. SlimLite XL/G features standard T-5 lamps which are available in a variety of colors with an optional plexiglas cover.

Product-Features

- Built-in electronic ballast
- Energy Efficient
- Uses standard T-5 lamps, CRI >82 (to be ordered separately)
- Extremely long bulb life of 20,000 hours
- Available in five lengths
- Optional plexiglas cover available (to be ordered separately)
- Contemporary white housing
- End of life circuitry to protect ballast
- Includes mounting brackets

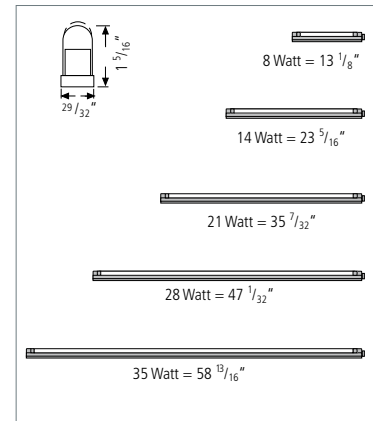

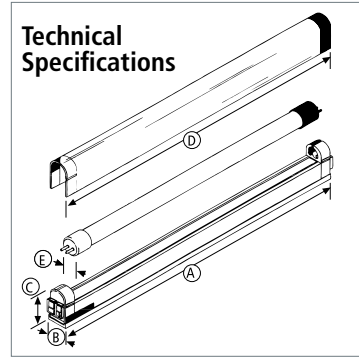

What you'll need to buy

SlimLite XL Grounded Light Fixture

Description	Watt	Length	Code No.
12"	8	13 1/8"	ES12/G
22"	14	23 5/16"	ES22/G
34"	21	35 7/32"	ES34/G
46"	28	47 1/32"	ES46/G
59"	35	58 13/16"	ES59/G

Also available with bulb and cover. Add **BC (Cool White)** or **WW BC (Warm White)** to product code.

	ES12	ES22	ES34	ES46	ES59
(A) fixture length	13 1/8"	23 5/16"	35 7/32"	47 1/32"	58 13/16"
(B) fixture width	1 1/32"	1 1/32"	1 1/32"	1 1/32"	1 1/32"
(C) fixture height with diffuser	1 11/16"	1 11/16"	1 11/16"	1 11/16"	1 11/16"
(D) tube length	11 1/4"	21 1/2"	33 1/4"	45 1/8"	57"
(E) tube diameter	T5 (5/8")	T5 (5/8")	T5 (5/8")	T5 (5/8")	T5 (5/8")
watts	8	14	21	28	35
lumens	400	1350	2100	2900	3650
current	136 mA	136 mA	198 mA	253 mA	315 mA
in-rush current	less than 5 AMP				
CRI	> 82	> 82	> 82	> 82	> 82
voltage	AC 120	AC 120	AC 120	AC 120	AC 120
frequency	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz
maximum watts in line	585 Watts	585 Watts	585 Watts	585 Watts	585 Watts

Accessories

	Description	Code No.
A Power Cord	6' long	SPC/XL/G
	Note: 72" standard. 24" and 48" available	
	6' with rocker switch	SPC72/S/XL/G
C Connecting Cables	6" long	SCC6/XL/R/G
	6" long with straight connector	SCC6/STC/G
D Direct Connector		SDC/XL/R/G
E Replacement Bulb	8 W Cool White	SFB8
	8 W Warm White	SFB8WW
	14 W Cool White	SFB14
	14 W Warm White	SFB14WW
	21 W Cool White	SFB21
	21 W Warm White	SFB21WW
	28 W Cool White	SFB28
	28 W Warm White	SFB28WW
	35 W Cool White	SFB35
	35 W Warm White	SFB35WW
F Hardwire Box (by special order only)		SHWC/XL/G
	with switch	SHWC/S/XL/G
G ON/OFF Rocker Switch		SRS/XL/R/G
Plexiglas Cover	for ES12/G	SPLX12/R/G
	for ES22/G	SPLX22/R/G
	for ES34/G	SPLX34/R/G
	for ES46/G	SPLX46/R/G
	for ES59/G	SPLX59/R/G